

Oil Eater Floor & All Purpose Cleaner – Powder

**NOW IN
TWO SIZES**




- Floor and all purpose cleaner
- Concentrated powder cleaner for use in a mop bucket, auto scrubber and spray bottles
- Portion controlled pouch packs are simple to use
- Pour into bucket, and water and clean
- Cuts through dirt, grease, fats and oil
- Concentrated, non-corrosive and biodegradable
- Use on concrete and asphalt as a floor cleaner
- Premeasured packets save time and money
- Recommend Usage: Use one 1.5 oz. powder packet with 4 gallons of water
- For heavily soiled areas, use two 1.5 oz. powder packets with 4 gallons of water

Part No.	Contents	Unit
AOF42G01801	1.5 oz. powder packets	100
AOF3801802	38 lbs. box	1

Toilet Bowl Hanger

- Clips to the toilet bowl in seconds
- Contains a surfactant stick that freshens the air while cleaning the bowl with every flush
- Citrus scent
- 1.5 oz

Part No.	Contents	Unit
77123	Toilet Bowl Hanger	12

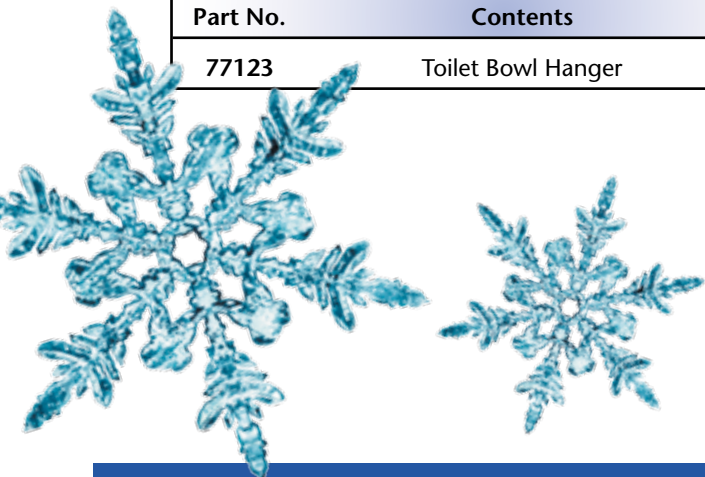

PRODUCT FOCUS

Square Drive Socket Adapters



- Ball retention design for quick-change application

Part No.	Sq. Drive (in.)	Shank Size (in.)	Length (in.)	Unit
B10375	1/4	1/4	2	1
B10376	3/8	1/4	1-5/8	1
KP35632	3/8	1/4	2	1
B10377	1/2	1/4	2	1
B10378	1/2	1/4	3	1

Stud Tie Mounts



- Easily applied to bolts or studs with a light hammering of the mount
- Designed for use with cable ties to route and secure cable bundles, air, water and hydraulic lines
- Material: Impact Modified Weather Resistant Nylon 6.6

Part No.	Length (in.)	Height (in.)	Max. Wire Bundle Dia. (in.)	Mounting Hole	Unit
TMSTHS13-C0	1.99	1.10	8.9	1/2" stud diameter	100
TMSTHS16-C0	1.99	1.10	8.9	5/8" stud diameter	100

Irwin® Multi-Tool Screwdriver

- Versatile enough for all hand fastening needs
- Include 6 bits and 3 nut drivers and provides internal storage to keep the bits and nut drivers close at hand
- Ergonomic ProTouch Grip offers comfort and slip resistance to achieve maximum torque while working
- Includes 6 bits: 1/4" and 3/16" slotted, #1 and #2 phillips, #1 and #2 square drive
- Includes 3 nut drivers: 1/4", 5/16" and 3/8"

Part No.	Description	Unit
B10379	9 in 1 Multi Tool	1

K-1550-01



Ninja® X Bi-Poly-Coated Gloves

- 15 gauge
- Nylon/spandex shell with black bi-polymer PU/Nitrile Coating on palm and fingertips
- Color: Black
- CE Score 412X
- Industry Applications: intricate assembly, microprocessors, printing, etc

Part No.	Size	Unit
N9674M	Medium	12 Pair
N9674L	Large	12 Pair
N9674XL	XLarge	12 Pair



Premium Grain Deerskin Drivers Gloves

- Industry Application - For forklift, fabricating, heavy vehicle, mining, repackaging and bundling operations offering superior abrasion resistance in heavy duty and rugged requirements.
- Unlined
- Keystone Thumb
- Cream Color

Part No.	Size	Unit
MEM3500M	Medium	12 Pair
MEM3500L	Large	12 Pair
MEM3500XL	XLarge	12 Pair

Ultratech® Kevlar® Nitrile Coated Palm

- Black nitrile dip fingers & palm
- Dupont Kevlar® brand fiber for high tensile strength relative to its weight- up to five times stronger than steel
- Seamless knit
- High Comfort Level
- CE score 3221; CPPT level 2
- Industry Applications: Automotive, Metal Fabrication, Glass Industry, and Food Processing



Part No.	Size	Unit
MEM9693L	Large	12 Pair
MEM9693XL	XLarge	12 Pair

Premium Grain Goatskin Drivers Gloves

- Grain kid Goatskin
- Excellent tensile strength
- Shirred Elastic Back
- Unlined
- Color: White
- Industry Application - For auto industry, forklift, fabricating, heavy vehicle, mining, repackaging and bundling operations offering superior abrasion resistance in heavy duty and rugged requirements.



Part No.	Size	Description	Unit
MEM3601M	Medium	Straight Thumb	12 Pair
MEM3601L	Large	Straight Thumb	12 Pair
MEM3601XL	XLarge	Straight Thumb	12 Pair
MEM3601XXL	XXLarge	Straight Thumb	12 Pair
MEM3611S	Small	Keystone Thumb	12 Pair
MEM3611M	Medium	Keystone Thumb	12 Pair
MEM3611L	Large	Keystone Thumb	12 Pair
MEM3611XL	XLarge	Keystone Thumb	12 Pair

Foam Insulated PVC

- Industry Application- construction, cold storage, outdoor winter requirements, petrochemical, and warehousing
- Florescent orange double dipped PVC foam lined
- Foam insulated gloves keep hands warm & dry
- Resistant to abrasions, oils, acids, chemicals, and caustics
- Special liquid-resistant coating for flexibility even in freezing weather
- Actifresh treated
- Thumb type: Wing



Part No.	Size	Unit
MEM6700F	Large	12 Pair

Select Grade Split Back Drivers Gloves

- Grain Leather palm side/Split leather back
- Gunn Pattern
- Keystone Thumb
- Cuff Style Open
- Cream Color



Part No.	Size	Unit
MEM3204M	Medium	12 Pair
MEM3204L	Large	12 Pair
MEM3204XL	XLarge	12 Pair

MEMPHIS™ Nitrile Dipped Nylon Gloves

- Seamless gray 100% nylon knit glove shell
- 100% black foam nitrile dipped palm & fingers
- 13 gauge
- CE score 3221
- Industry Application- Assembly, Manufacturing, small parts handling & general purpose



Part No.	Size	Unit
MEM9673M	Medium	12 Pair
MEM9673L	Large	12 Pair
MEM9673XL	XLarge	12 Pair

Big Buck™ Premium Mig/Tig Welders

- Industry Applications - For use in welding and heat applications that offer protection from heat, flame or spark
- Premium grain deerskin, full leather back
- Unlined and sewn with Kevlar thread
- 4-1/2" Length Split Deer safety cuff
- Tan Color



Part No.	Size	Material	Unit
MEM4984L	Large	Split deer full leather back	1 Pair
MEM4984XL	XLarge	Split deer full leather back	1 Pair

Ultratech® Dyneema® Poly-Dipped Gloves

- 13 Gauge Salt and Pepper Dyneema® blended seamless shell
- Gray polyurethane palm and finger coated
- Dyneema's® fiber's inherent ability to dissipate body heat & pass moisture from inside of the glove to the outside, results in longer wear time which promotes greater hand protection
- Washable
- CE score 4343; CPPT cut level 2
- Industry Applications: Automotive, metal fabrication, ceramics, paper & pulp industry and textile industry



Part No.	Size	Unit
MEM9676M	Medium	1 Pair
MEM9676L	Large	1 Pair
MEM9676XL	XLarge	1 Pair
MEM9676XXL	XXLarge	1 Pair

Klondike® Safety Glasses

- Single lens design with molded in sideshields and adjustable temples
- Frame material – Nylon
- Frame color – Black Matte
- Lens material – Polycarbonate
- Lens coating - Duramass® Scratch Resistant Hard Coating
- Ear grips – PVC
- Nose piece – gel
- Lens thickness 2.1 mm (.084); Lens size = 138mm
- Filters out 99.9% of UV radiation
- Meets or exceeds ANSI Z87.1-1989 safety standards



Part No.	Frame	Lens	Unit
CRWKD112	Black Matte	Grey	1 Pair
CRWKD110AF	Black Matte	Clear anti-fog	1 Pair



Klondike® Plus Safety Glasses



- Safety and style at an affordable price!
- 5- position ratchet temples
- Gel nose piece for long wearing comfort
- Strong lightweight polycarbonate lens with 11 degree base curve
- Duramass® scratch resistant coating
- Meets or exceeds ANSI Z87+ safety standards

Part No.	Frame	Lens	Unit
CRWKD312	Black	Grey	1 Pair
CRWKD310	Black	Clear Lens	1 Pair
CRW310AF	Black	Clear Anti-fog	1 Pair

ClearPlus® Universal Beam Blades





- Joint-less bracket-less frame has a lower profile than traditional wiper blades, which greatly reduces windlift, noise, vibration and chatter
- All-Season
- Works with all traditional arms and more!

Part No.	Size	Unit
17161-16	16"	5
17171-17	17"	5
17181-18	18"	5
17191-19	19"	5
17201-20	20"	5
17211-21	21"	5
17221-22	22"	5
17241-24	24"	5
17261-26	26"	5
17281-28	28"	5



PEEL-BAK® Weatherstripping

- Black neoprene, adhesive

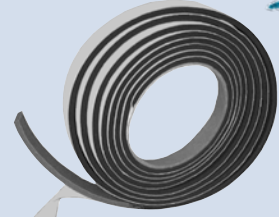

Part No.	Thickness (in.)	Width (in.)	Length (in.)	Unit
77806	5/32	1/2	50	1 roll
77807	5/32	3/4	50	1 roll
77808	5/32	1	50	1 roll
77809	5/16	1/2	50	1 roll
77810	5/16	3/4	50	1 roll
77805	5/16	1	10	1 roll
77811	5/16	1	50	1 roll
77812	7/16	3/4	50	1 roll
77813	7/16	1	50	1 roll


Lead "XT" Series Clip-On Wheel Weights

- For stamped "extra thin" steel wheels

Part No.	Weight (oz.)	Unit
62300	1/2	50
62301	3/4	50
62302	1	50
62303	1-1/4	50
62304	1-1/2	50
62305	1-3/4	50
62306	2	50
62307	2-1/4	50
62308	2-1/2	50

Lead QuikStik® – Standard

Adhesive weight



- Each strip contains: 3 oz. strips, pre-cut into 12 low-profile 1/4 oz. segments

Part No.	Color	Weight (oz.)	Unit
62326	Black	1/4 (7 g.)	30
62327	Silver	1/4 (7 g.)	30

Electronic Flasher

- Number Terminals: 5
- Style: Square
- Pilot Circuit: Yes
- Amp Capacity: 12
- Volt Capacity: 12
- # of Lamps Unit will Flash: 4
- # Lamps for Turn Signal: 2
- Lamp Load: 2 to 6
- Flashers Comply: SAE J590b, J945 & J1690



Part No.	Description	Ind. No.	Unit
EF27	Combination TS & Haz	EF27	1

Electronic Flasher

- Flasher Type: Electronic Flasher
- Style: Square
- Amp Capacity: 12
- Volt Capacity: 12
- # Lamps Unit Will Flash: 2 to 6
- # Lamps for Turn Signal: 2
- Lamp Load: 2 to 6
- Mounting Bracket: BR1
- Flashers Comply: SAW J590, J945 & J1690

Part No.	Ind. No.	Desc	Unit
8659	EP-35	Combination TS & Haz	1

MINI-BULBS

PK22s



Part No.	Ind. No.	Bulb Style	Amp Rating	Volt-age	Watts	Unit
90054	H4	T-3-1/4	4.17	28	100	1
	100W	1/4				
	24V					
H335W	H335W	T-3-1/4	2.92	13.20	35	1
H335WHD	H335WHD	T-3-1/4	4.58	13.20	55	1

D.F. Plastic Wedge



Part No.	Ind. No.	Bulb Style	Amp Rating	Volt-age	Watts	Unit
4114LL	4114LL	S-8	2.23/8.26	14/14	31.2/8.26	10

S.C. Bayonet (BA15s)



Part No.	Ind. No.	Bulb Style	Amp Rating	Volt-age	Watts	Unit
90056	1309	B-6	0.52	28	14.56	10
90067	796	T-6	2.73	12.80	35	1
90058	303	G-6	0.3	28	8.4	10
90059	305	S-8	0.51	28	14.28	10
90060	307	S-8	0.67	28	18.76	10

Wedge (T-1 3/4)



Part No.	Ind. No.	Bulb Style	Amp Rating	Volt-age	Watts	Unit
90057	18	T-1-3/4	0.04	14	0.56	10

D.C. Bayonet (BA15d)



Part No.	Ind. No.	Bulb Style	Amp Rating	Volt-age	Watts	Unit
25T8DC	25T-8	T-8	0.19	130	25	1



Tel Slide No. 5



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
24PSB	24PSB	T-2	0.073	24	1.752	10
28PSB	28PSB	T-2	0.04	28	1.12	10

Miniature Bayonet (BA9s)



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
28MB	28MB	T-2-1/2	0.04	28	1.12	10
90061	3797	T-2-3/4	0.083	24	2	10
90068	55	G-4-1/2	0.41	7	2.87	10

Festoon Cap



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
90064	6429	T-3-1/4	0.42	24	10.08	10

Wedge (T-3 1/4)



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
90062	400	T-3-1/4	0.1	28	2.8	10
90065	658	T-3-1/4	0.08	14	1.12	10

Candelabra Mini Bulb



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
90066	656	S-6	0.05	120	6	10

G4 Bi-Pin




Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
JC20	JC20	T-2-1/4	1.67	12.00	20	1

PC74



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
PC74	PC74	T-1-3/4	0.1	14.00	1.4	10

PR4



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
PR4	PR4	B-3-1/2	0.27	2.33	0.6291	10

Right Angle Prefocus (HB4)



Part No.	Ind. No.	Bulb Style	Amp Rating	Voltage	Watts	Unit
998377	9006LL	T-4	4.30	12.8	55	1

Bowmabraz® Brazing Flux

- White powder
- Recommended for use with Bowmabraz® 900 Brazing Alloy and Bowmabraz® 25000 Premium Quality Brazing Alloy
- Highly active; very effective on rusty, greasy steel and malleable cast iron.



Part No.	Desc	Unit
24900	Brazing Flux	1 lb. canister

GM Flip Key Fixture



Part No.	Description	Unit
C25922	Key blade removal tool w/pin punch	1
C25906	5 GM Replacement Blades & 7 Pins	1

No. 7 Laminated Padlock

- Non-rekeyable, 4-pin W7 cylinder helps prevent picking
- Dual locking levers provide pry resistance



Part No.	Shackle Clearance (in.)	Shackle Dia. (in.)	Unit
29999	9/16 (14mm)	3/16 (5mm)	6

Master Lock Government Locks

- 1-1/2" (38mm) wide Zenex body
- Steel shackle
- Without chain



Part No.	Shackle Clearance (in.)	Shackle Dia. (in.)	Unit
410RED	1-1/2 (38mm)	1/4 (6mm)	6

PRODUCT FOCUS

Hasps and Hasplocks



- Hardened steel staple resist cutting and sawing
- Hardened steel locking eye for strong cut resistance
- Tamper proof hinge help resist prying
- Mounting hardware included
- Best used for: gates & fences, sheds, workshops & garages, tool chests & tool boxes, cabinets

Part No.	Description	Unit
702D	3-1/2" (89mm) hard wrought steel body Accepts shackle diameter up to 11/32" (9mm)	4
703D	3-1/2" (89mm) hard wrought steel body Accepts shackle diameter up to 11/32" (9mm)	4
704D	4-1/2" hard wrought steel body Accepts shackle diameter up to 1/2"	4

Grade 8 Carriage Bolts, Zinc Clear Plating (Shaker Screen Bolts)



- Fully threaded
- Meets industry standards for Grade 8

Part No.	Dia.-TPI	Lgth. (in.)	Unit
999809	3/4-10	2	25
999810	3/4-10	2-1/2	25
999811	3/4-10	3	25
999812	3/4-10	3-1/2	25


Plastic Screw Anchor Kits

- Kit includes 100-plastic screw anchors and sheet metal screws
- Use in solid concrete, brick, masonry, and drywall
- Ideal for light duty fixtures



Part No.	Fits Screw Size	Hole Size (in.)	Length (in.)	Unit
KP150054-1	8, 10	3/16	7/8	1
KP150055-1	10, 12	1/4	1	1
KP150056-1	1/4, 16	5/16	1-3/8	1

Power-Bolt® Anchors, Heavy Duty Sleeve Type

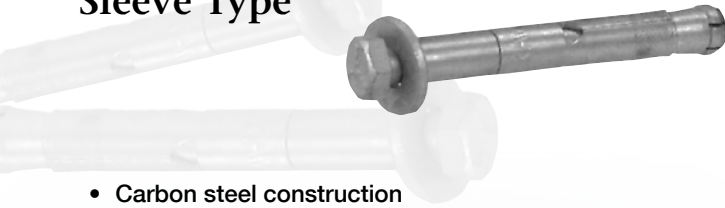

- Carbon steel construction
- Zinc Chromate plated
- Manufactured using a Grade 5 bolt
- Designed to be used in concrete, block, brick, or stone
- Anchor and hole diameters are identical which eliminates the need for hole spotting or layout
- Vibration-resistant and removable
- Stronger than stud or sleeve anchors
- See Powers website, www.powers.com, for current performance data

Part No.	Size (in.)	Head Type	Min. Depth (in.)	Guide Torque (ft.-lbs.)	Unit
06907	5/16 x 1-3/4	Hex	1-1/2	12	100
06908	5/16 x 2-1/2	Hex	1-1/2	12	50
06909	5/16 x 3-1/2	Hex	1-1/2	12	50
06950	3/4 x 3-1/4	Hex	3	120	15
06981	3/8 x 3-3/4	Flat	2	25	50
06982	3/8 x 5	Flat	2	25	50
06983	3/8 x 6	Flat	2	25	50
06984	1/2 x 5	Flat	2-1/2	45	25
06987	5/8 x 5-1/2	Flat	2	25	15

Lok-Bolt™, Sleeve Expansion Anchors



- Carbon steel construction
- Zinc plated
- Designed to be used in concrete
- Anchor and hole diameters are identical which eliminates the need for hole spotting or layout
- See Powers website, www.powers.com, for current performance data

Part No.	Size (in.)	Min. Embedment. (in.)	Unit
05032S	1/2 x 6	2-1/4	10

The published length is measured from below the washer to the end of the anchor.

PRODUCT FOCUS

Wedge Bit, Hammer Drill for Wedge Bolt®



- Regular helix with SDS+ shank
- 118 masonry point
- Carbide tipped
- 4340 steel (34-Cr Ni Mo 6)
- See Powers website, www.powers.com, for current performance data

Part No.	Dia. (in.)	Usable Lgth. (in.)	OAL (in.)	Unit
01312	1/4	2	4	1
01314	1/4	4	6	1
01324	5/8	6	8	1
01326	5/8	10	12	1
01328	3/4	6	8	1
01330	3/4	10	12	1

Wedge Bolt® Concrete Anchors

- Easy, through the fixture installation
- Removable
- Hex washer head-zinc plated
- Made in U.S.A.
- ASTM B633, SCl, Type III
- ASTM E488
- Serrated washer locks anchor against fixture
- City of Los Angeles approved-report 25415
- See Powers website, www.powers.com, for current performance data

Part No.	Size (in.)	Lgth. (in.)	Min. Embedment (in.)	Unit
7206SD	1/4	1-3/4	1	25
7208SD	1/4	2-1/4	1	25
7210SD	1/4	3	1	25
7228SD	3/8	5	1-1/2	10
7230SD	3/8	6	1-1/2	10
7250SD	1/2	6	1-1/2	10
7268SD	1/2	6-1/2	1-3/4	10
7252SD	1/2	8	1-3/4	10
7260SD	5/8	3	2-1/2	5
7262SD	5/8	4	2-1/2	5
7264SD	5/8	5	2-1/2	5
7266SD	5/8	6	2-1/2	5
7270SD	5/8	8	2-1/2	5
7280SD	3/4	3	2-1/2	5
7282SD	3/4	4	3	5
7284SD	3/4	5	3	5
7286SD	3/4	6	3	5
7288SD	3/4	8	3	5

Wall-Dog™ Universal Light Duty



- Installs in a variety of base materials
- Installs directly through fixtures into wallboard; no second step required
- Thread design prevents spinning and stripping
- Available in multiple head styles and finishes
- All items 1/4" diameter
- No pilot hole required

Part No.	Size (in.)	Description	Unit
02288	1-1/4	Phillips Oval Head - Black	100
MP02288	1-1/4	Phillips Oval Head - Black	25
02292	1-1/4	Phillips Oval Head - Brass	100
MP02292	1-1/4	Phillips Oval Head - Brass	25
02328	1-1/4	Phillips Oval Head - White	100
MP02328	1-1/4	Phillips Oval Head - White	25
02314	1-1/4	Phillips Oval Head - Zinc	100
MP02314	1-1/4	Phillips Oval Head - Zinc	25
02286	1-1/4	Phillips Pan Head - Black	100
MP02286	1-1/4	Phillips Pan Head - Black	25
02294	1-1/4	Phillips Pan Head - Brass	100
MP02294	1-1/4	Phillips Pan Head - Brass	25
02274	1-1/2	Phillips Pan Head - Bronze	100
MP02274	1-1/2	Phillips Pan Head - Bronze	25
02330	1-1/4	Phillips Pan Head - White	100
MP02330	1-1/4	Phillips Pan Head - White	25
02273	1-1/2	Phillips Pan Head - White	100
MP02273	1-1/2	Phillips Pan Head - White	25
02275	1-1/2	Phillips Pan Head - Zinc	100
MP02275	1-1/2	Phillips Pan Head - Zinc	25
02277	1-1/2	Phillips Wafer Head - White	100
MP02277	1-1/2	Phillips Wafer Head - White	25
02278	2	Phillips Wafer Head - White	100
MP02278	2	Phillips Wafer Head - White	25
02279	2-1/4	Phillips Wafer Head - White	100
MP02279	2-1/4	Phillips Wafer Head - White	10
02280-1	2-1/2	Phillips Wafer Head - White	100
MP02280-1	2-1/2	Phillips Wafer Head - White	10

316 Stainless Steel Nord-Lock Washers

- 20 compartment tray and lid label
- 316 Stainless Steel Nord-Lock Washers, No. 10 through 3/4" diameters
- 9 items/28 pieces

Part No.	Unit
60020B	1

Power-Stud™ +SD1



- Carbon steel construction
- Zinc plated to ASTM B633, SC1, Type III
- Approved for use in cracked and uncracked concrete
- Anchor and hole diameters are identical which eliminates the need for hole spotting or layout
- Meets ICC-ES ESR-2818, Category 1
- See Powers website, www.powers.com, for current performance data

Part No.	Size (in.)	Thread Lgth. (in.)	Unit
7412SD1	3/8 x 2-3/4	1-5/8	50
7414SD1	3/8 x 3-1/2	2-3/8	50
7417SD1	3/8 x 7	5-7/8	50
7427SD1	1/2 x 8-1/2	7-1/8	25
7428SD1	1/2 x 10	8-1/8	25
7432SD1	5/8 x 4-1/2	3	25
7436SD1	5/8 x 7	5	25
7439SD1	5/8 x 10	8-1/2	25
7444SD1	3/4 x 6-1/4	3-3/8	20
7448SD1	3/4 x 8-1/2	3-3/8	10
7451SD1	3/4 x 12	10-1/8	10
7450SD1	7/8 x 6	2-3/4	10
7452SD1	7/8 x 8	4-3/4	10
7454SD1	7/8 x 10	6-3/4	10
7463SD1	1 x 9	4-1/2	10
7465SD1	1 x 12	8-3/8	5

303 Stainless Steel Dropin Anchors



- Stainless steel bolt anchor
- Use in harsh environments
- Solid concrete, hard stone, and solid block

Part No.	Dia. (in.)	Length (in.)	Thread Depth (in.)	Unit
06204	1/4	1	7/16	25
06206	3/8	1-9/16	5/8	10
06208	1/2	2	13/16	10
06210	5/8	2-1/2	1-3/16	5
06212	3/4	3-3/16	1-3/8	5

304 Stainless Steel Wedge Anchors



- Use in applications involving harsh environments, chemicals marine
- City of Los Angeles approval
- Meets federal spec GSA Spec. FFS-325 Int. Amd.-3 Group 2, Type 4, Class 1
- See Powers website, www.powers.com, for current performance data

Part No.	Dia. (in.)	Lgth. (in.)	Min. Embedment (in.)	Unit
07314	3/8	3-1/2	1-5/8	10
07324	1/2	5-1/2	2-1/4	10
07326	1/2	7	2-1/4	5
07330	5/8	3-1/2	2-3/4	5
07332	5/8	4-1/2	2-3/4	5
07333	5/8	5	2-3/4	5
07334	5/8	6	2-3/4	5
07336	5/8	7	2-3/4	5
07338	5/8	8-1/2	2-3/4	5
07340	3/4	4-1/4	3-3/8	5
07341	3/4	4-3/4	3-3/8	5
07342	3/4	5-1/2	3-3/8	5
07344	3/4	6-1/4	3-3/8	5
07346	3/4	7	3-3/8	5
07348	3/4	8-1/2	3-3/8	5

2-Piece Nord-Lock Lock Washers, Delta-Protekt® Coating



- Carbon steel
- Through-hardened
- Designed to fit fractional and metric fasteners

Part No.	Size (mm)	Unit (pairs)
A98000	M6	200
MPA98000	M6	50
A98001	M10	200
MPA98001	M10	25
A98002	M12	100
MPA98002	M12	10
A98003	M18	100
MPA98003	M18	10
A98004	M20	10
MPA98004	M20	5
A98005	M24	10
MPA98005	M24	5
A98006	M27	10
MPA98006	M27	5

PRODUCT FOCUS



2-Piece Nord-Lock Lock Washers, 316 Stainless Steel



- Washers designed to resist loosening
- 316 Stainless Steel
- Used and sold in pairs

Part No.	Size (in.)	Size (mm)	Unit (pairs)
A98010	No. 6	M3.5	25
MPA98010	No. 6	M3.5	5
A98011	No. 8	M4	25
MPA98011	No. 8	M4	5
A98012	No. 10	M5	25
MPA98012	No. 10	M5	5
A98013	–	M6	25
MPA98013	–	M6	5
A98014	1/4	–	25
MPA98014	1/4	–	5
A98015	5/16	M8	10
MPA98015	5/16	M8	3
A98016	3/8	–	10
MPA98016	3/8	–	3
A98017	–	M10	10
MPA98017	–	M10	3
A98018	7/16	M11	10
MPA98018	7/16	M11	3
A98019	–	M12	10
MPA98019	–	M12	3
A98020	1/2	–	10
MPA98020	1/2	–	3
A98021	9/16	M14	5
MPA98021	9/16	M14	2
A98022	5/8	M16	5
MPA98022	5/8	M16	2
A98023	–	M18	5
MPA98023	–	M18	2
A98024	3/4	–	5
MPA98024	3/4	–	2
A98025	–	M20	5
MPA98025	–	M20	2
A98026	7/8	M22	5
MPA98026	7/8	M22	2
A98027	–	M24	5
MPA98027	–	M24	2
A98028	1	–	5
MPA98028	1	–	2

Alcoa Rivet Tool Hand Operated



- Durable, high quality design
- Precision die-case
- High strength aluminum alloy body
- Drop-forged carbon steel upper handle
- Cushion-molded vinyl grips

Part No.	Description	Unit
HP-2	Hand held rivet tool with 3/32", 1/8", 5/32", and 3/16" nose pieces	1
HP-2-18	1/8" Replacement nose piece	1
HP-2-332	3/32" Replacement nose piece	1
HP-2-532	5/32" Replacement nose piece	1
HP-2-316	3/16" Replacement nose piece	1

Starter Rope



- Nylon material
- Ideal for small and medium engines

Part No.	Dia. (in.)	Length (ft.)	Rope Size	Unit
5978559	7/64	100	3-1/2	1
5978253	1/8	100	4	1
5978254	9/64	100	4-1/2	1
5978255	5/32	100	5	1
5978256	11/64	100	5-1/2	1
5978257	3/16	100	6	1
5978261	7/32	100	7	1
5978262	1/4	100	8	1


Brass Double End Bolt Snaps



- Brass material for marine applications
- Sturdy spring for quick release

Part No.	Approx. OAL (in.)	Snap Opening. (in.)	Unit
A4424840	3-1/2	3/8	5

Ratchet Type Load Binders

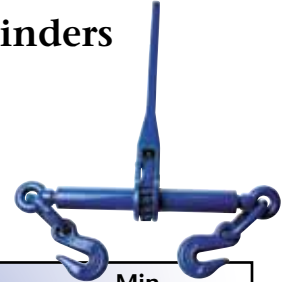

- Meets all Department of Transportation regulations
- 360° swivel at both ends
- Import load binders
- **WARNING:** Binders are not to be used with handle extenders

Part No.	Size (in.) Grade	Working Load Limit (lbs.)	Type	Lever Lgth. (in.)	Min. breaking take-up (in.)	Unit
						Unit
A5200655	5/16 70, 1/2 Grade 43	9200	Ratchet	15.5	8	1

Grade 70 Transport Tie-down Chain



- Grade 70 clevis grab hook on both ends
- Applications include load binding, farming, lumbering, towing and construction
- Meets Department of Transportation regulations
- Yellow chromate NACM finish

Part No.	Size (ft.)	Working Load Limit (lbs.)	Unit
A5261363	5/16 x 20'	4700	1
A5262363	3/8 x 20'	6600	1

Jack Chain



- Single link
- Low carbon steel
- Zinc Plating
- Use in applications where high strength is not required
- 100' rolls

Part No.	Trade Size	Working Material Dia. (in.)	Load Limit (lbs.)	Unit
A7501632	16	.062	10	1
A7501432	14	.080	16	1
A7501232	12	.105	29	1
A7501032	10	.135	43	1
A7500832	8	.162	60	1
A7500632	6	.192	88	1

Grade 70 Clevis Slip Hooks with Latch



- Forged for maximum strength
- Peer-Gold Zinc Yellow Plating

Part No.	Size (ft.)	Working Load Limit (lbs.)	Unit
A8015275	1/4	3150	1
A8015375	5/16	5350	1
A8015475	3/8	6600	1
A8015675	1/2	11300	1

Grade 43 Clevis Slip Hooks with Latch



- Forged for maximum strength
- Zinc clear plating

Part No.	Size (ft.)	Working Load Limit (lbs.)	Unit
A8016275	1/4	2600	1
A8016375	5/16	3900	1
A8016475	3/8	5400	1
A8016675	1/2	9200	1



Bowma-Seal™ Heat Shrinkable Male Snap Plug

Part No.	Wire Range (AWG)	Tab Size	Insulation Color	Unit
71815M	20-18	.157	Red	25
71817M	20-18	.180	Red	25



Part No.	Wire Range (AWG)	Tab Size	Insulation Color	Unit
23844	16-14	.157	Blue	25
71417M	16-14	.180	Blue	25

Bowma-Seal™ Heat Shrinkable Female Plug Receptacle



Part No.	Wire Range (AWG)	Tab Size	Insulation Color	Unit
71815F	20-18	.157	Red	25
71817F	20-18	.180	Red	25
71415F	16-14	.157	Blue	25
71417F	16-14	.180	Blue	25

